



EGO™
COMMERCIAL

2025 PRODUCT CATALOG





TABLE OF CONTENTS

EGO Commercial PGX™ Charging	4
EGO Commercial Mowers	14
EGO Commercial Blower	16
EGO Commercial String Trimmer	20
EGO Commercial Bike Handle Brush Cutter	22
EGO Commercial Edger	24
EGO Commercial Pole Hedge Trimmer	26
EGO Commercial Telescopic Pole Saw	30
EGO Commercial Chain Saw	32
EGO Commercial Multi-Head	34
EGO Commercial Battery Technology	36
EGO Commercial Accessories	38
EGO Commercial Power Manager	40



**MAXIMIZE
YOUR UPTIME**

**WORK
ALL DAY**



CHARGE OVERNIGHT

PGX[™] COMMERCIAL CHARGING SYSTEM

A flexible charging solution that
scales to your business.



PGX[™] 1600W HUB

Mounts in a
building, van, or
trailer, and runs
off any standard
15A circuit



PGX[™] 3-PORT DOCK

Simultaneously
charges up to
three EGO 56V
ARC Lithium[™]
batteries



**PGX™
POWER BANK**

Charges 30+ Ah
of portable
batteries during
the day





IT STARTS WITH THE POWER HUB

- ONLY ONE POWER HUB NEEDED
- CONNECTS TO PGX[™] COMMERCIAL CHARGING 3-PORT DOCKS
- MOUNTS IN A BUILDING, VAN, OR TRAILER
- RUNS OFF OF A SINGLE 15A CIRCUIT

PGX1600H

PGX™ COMMERCIAL CHARGING 1600W HUB



POWER REQUIREMENT	15A CIRCUIT
INPUT WATTAGE	1600W
OUTPUT CURRENT	24A
CONNECTIVITY	BLUETOOTH & WIFI
DIMENSIONS	16" x 6.25" x 10"



CHARGE UP TO 70 BATTERIES (15kWh) OVERNIGHT

- 3-PORT DOCK CHARGES 3 BATTERIES SIMULTANEOUSLY
- CONNECT UP TO 24 DOCKS TO ONE PGX[™] HUB
- DOCKS CHARGE IN SERIES

PGX3000D

PGX™ COMMERCIAL CHARGING 3-PORT DOCK



CHARGE STATUS INDICATOR

INTEGRATED LOCKING BAR
(REQUIRES 7MM SHACKLE PADLOCK)

E-TRACK COMPATIBLE
(REQUIRES AEK1000
ACCESSORY KIT,
SOLD SEPARATELY)

RUGGED 2-FOOT
CONNECTION CABLE



CHARGE 3 BATTERIES SIMULTANEOUSLY

STEEL-REINFORCED THROUGH-HOLE SCREW MOUNTING



7x MOUNTING HOLE LOCATIONS

POWER REQUIREMENT	PGX™ HUB (15A CIRCUIT)
EXPANDABLE	Yes
DIMENSIONS	23.5" x 6.75" x 11.5"



CHARGE DURING THE DAY

- CHARGES 30+ Ah OF EGO POWER+ PORTABLE BATTERIES DURING THE DAY
- WORKS SEAMLESSLY WITH THE POWER HUB
- LARGE FORMAT BATTERIES CAN BE SWAPPED FOR MORE CAPACITY



PGX3100K

PGX™ COMMERCIAL POWER BANK KIT

KIT INCLUDES:
POWER BANK
2.2kWh (40Ah) HIGH-CAPACITY BATTERY
(2) 7.5Ah BATTERIES
PGX™ CABLE

POWER STATUS LED & BATTERY CHARGE STATUS LED



INTEGRATED LOCKING BAR (REQUIRES 7MM SHACKLE PADLOCK)



STACK UP TO 2 UNITS

CHARGE TWO BATTERIES SIMULTANEOUSLY

ROBUST ROLL CAGE DESIGNED FOR MAXIMUM DURABILITY

EXPANDABLE
CONNECT MORE PGX™ SYSTEM UNITS TOGETHER TO CHARGE MORE BATTERIES

FUEL GAUGE
INTEGRATED FOLDING HANDLE



HC2240T

VOLTAGE	56V
ENERGY	2.2kWh (40Ah)
AC RECHARGE REQUIREMENT	PGX™ HUB (15A CIRCUIT)
CHARGE TIME	120 MINUTES (40Ah HIGH CAPACITY)
CONNECTIVITY	BLUETOOTH
WEIGHT	39 LBS
DIMENSIONS	13.3" x 6.8" x 12.7"
WEATHER RESISTANCE RATING	IPX4

PGX3100K

AC RECHARGE REQUIREMENT	PGX™ HUB (15A CIRCUIT)
CHARGE TIME (AC)	120 MINUTES (40Ah HIGH CAPACITY)
CHARGE TIME (DC)	75 MINUTES with two 12.0Ah 60 MINUTES with two 10.0Ah 50 MINUTES with two 8.0Ah 45 MINUTES with two 7.5Ah 35 MINUTES with two 6.0Ah 30 MINUTES with two 5.0Ah 25 MINUTES with two 4.0Ah 30 MINUTES with two 2.5Ah
DC CHARGING SPEED	2x 700W
EXPANDABLE	YES
CONNECTIVITY	BLUETOOTH
WEIGHT	38 LBS
DIMENSIONS	20.25" x 16.5" x 16"
WEATHER RESISTANCE RATING	IPX4



INDUSTRY'S MOST POWERFUL GAS OR CORDLESS WALK-BEHIND MOWER



Compared to 22" and below
deck size commercial walk behinds

LMX5300SP

COMMERCIAL 22" ALUMINUM DECK SELF-PROPELLED LAWN MOWER

**PEAK
POWER
TECHNOLOGY**

COMBINES THE
POWER OF
TWO OR MORE
EGO ARC LITHIUM™
BATTERIES



GAS EQUIVALENT	230CC RATING
TORQUE	14.8 FT-LBS
MAX POWER	4000W
RATED POWER	1600W
RUNTIME with two 12.0Ah batteries	UP TO 120 MINUTES
RECHARGE TIME with two 12.0Ah batteries using PGX™ Power Bank	75 MINUTES
BATTERY WATTS	8960
SELF-PROPELLED	YES

CUTTING SYSTEM	COMMERCIAL SINGLE BLADE
CUTTING HEIGHTS	8
DECK SIZE	22"
MAX BLADE TIP SPEED	18,000 FPM
DECK MATERIAL	ALUMINUM
BATTERY TECHNOLOGY	56V ARC LITHIUM™
WEIGHT bare tool	99.2 LBS
WEATHER RESISTANCE RATING	IPX5



NOBODY HAS MORE POWER

Based on September 2024 cordless commercial BP blowers available

LBPX1100

COMMERCIAL 1100 CFM BACKPACK BLOWER WITH PEAK POWER™



DUAL GRAB HANDLES

3-POINT SUPPORT BASE FOR STABILITY

OPTIMIZED AIRFLOW EFFICIENCY FOR EXTENDED RUNTIME

PREMIUM STRAPS & BACK PADS

WITH IMPROVED ADJUSTABILITY AND BACK PADS WITH ADDED LUMBAR SUPPORT TO EVENLY DISTRIBUTE WEIGHT FOR ALL-DAY COMFORT

DIGITAL CONTROLS WITH TURBO LOCK TAILOR PERFORMANCE TO THE WAY YOU WORK

FULLY ADJUSTABLE HAND GRIP & TUBE

**PEAK
POWER
TECHNOLOGY**

COMBINES THE POWER OF TWO OR MORE EGO ARC LITHIUM™ BATTERIES

GAS EQUIVALENT	65CC RATING
CLEARING CAPACITY	1100 CFM
AIR SPEED with nozzle	190 MPH
PUSH FORCE	36N
MAX POWER	2700W
RUNTIME with two 12.0Ah batteries	UP TO: 240 MINS ON LOW 36 MINS ON HIGH 30 MINS ON TURBO
DECIBEL RATING measured at 50 feet per ANSI standards	65db(A)
BATTERY TECHNOLOGY	56V ARC LITHIUM™ with PEAK POWER™
HOUSING	UV-RESISTANT COMPOSITE
WEIGHT bare tool	21.2 LBS
WEATHER RESISTANCE RATING	IPX5

LBPX8010

COMMERCIAL 800 CFM BACKPACK BLOWER WITH PEAK POWER™



PREMIUM STRAPS & BACK PADS

DIGITAL CONTROLS WITH TURBO LOCK
TAILOR PERFORMANCE TO THE WAY YOU WORK

FULLY ADJUSTABLE HAND GRIP & TUBE

3-POINT SUPPORT BASE FOR STABILITY

DUAL GRAB HANDLES

OPTIMIZED AIRFLOW EFFICIENCY FOR EXTENDED RUNTIME

PEAK POWER TECHNOLOGY™

COMBINES THE POWER OF TWO OR MORE EGO ARC LITHIUM™ BATTERIES

GAS EQUIVALENT	60CC RATING
CLEARING CAPACITY	800 CFM
AIR SPEED	190 MPH
PUSH FORCE	26N
MAX POWER	1900W
RUNTIME with two 12.0Ah batteries	UP TO: 240 MINS ON LOW 64 MINS ON HIGH 50 MINS ON TURBO
DECIBEL RATING measured at 50 feet per ANSI standards	65db(A)
BATTERY TECHNOLOGY	56V ARC LITHIUM™ with PEAK POWER™
HOUSING	UV-RESISTANT COMPOSITE
WEIGHT bare tool	16.3 LBS
WEATHER RESISTANCE RATING	IPX5

Additional SKU Configurations:

LBPX8000 Batteries and charger not included. IoT not included.

LBPX8004-2 Includes (2) 6.0Ah batteries and 280W Dual Port charger. IoT not included.

LBPX8006-2 Includes (2) 10.0Ah batteries and 280W Dual Port charger. IoT not included.

LBX1000

COMMERCIAL 1000CFM HANDHELD BLOWER



GAS EQUIVALENT	60CC RATING
CLEARING CAPACITY	1000 CFM
STANDARD OPERATING RANGE	450 - 800 CFM
AIR SPEED with nozzle	185 MPH
PUSH FORCE	32N
RUNTIME with 10.0Ah battery	UP TO: 100 MINS / LOW 30 MINS / HIGH 20 MINS / TURBO
DECIBEL RATING measured at 50 feet per ANSI standards	65db(A)
BATTERY TECHNOLOGY	56V ARC LITHIUM™
HOUSING	UV-RESISTANT COMPOSITE
WEIGHT bare tool	7.3 LBS
WEATHER RESISTANCE RATING	IPX5



20% MORE POWER

Compared to ST1623T

STX4500

COMMERCIAL 17.5" STRING TRIMMER



HIGH-PERFORMANCE
BRUSHLESS MOTOR

VARIABLE SPEED,
INSTANT-ON TRIGGER

3-SPEED DIGITAL SPEED CONTROL

SHOULDER STRAP HOOK
(SHOULDER STRAP AVAILABLE)



COMPATIBLE WITH ABB1203-1
(SOLD SEPARATELY)

CARBON FIBER SHAFT
STRONG AND LIGHT

OVERMOLDED
QUICK-ADJUST
HANDLE

RAPID RELOAD
HEAD
BACK TO WORK IN
SECONDS

GAS EQUIVALENT	35CC RATING
MAX POWER	1600W
RATED POWER	1200W
RUNTIME with 5.0Ah battery on low	UP TO 60 MINUTES
MAX CUTTING CAPACITY	17.5"
MAX LINE DIAMETER	0.120"
HEAD ROTATION	COUNTER-CLOCKWISE
SPEEDS no load RPM	3500/4500/5700 RPM 3-SPEED DIGITAL CONTROL
SHAFT MATERIAL	CARBON FIBER
LINE LOAD	RAPID RELOAD
DRIVE SHAFT	SOLID STEEL
AUXILIARY HANDLE CONSTRUCTION	OVERMOLDED
BATTERY TECHNOLOGY	56V ARC LITHIUM™
HOUSING	UV-RESISTANT COMPOSITE
TOOL LENGTH	72"
WEIGHT bare tool	9 LBS
WEATHER RESISTANCE RATING	IPX5




MORE POWER THAN GAS

Compared to Stihl FS111

BCX4500


COMMERCIAL 12" BIKE HANDLE BRUSH CUTTER

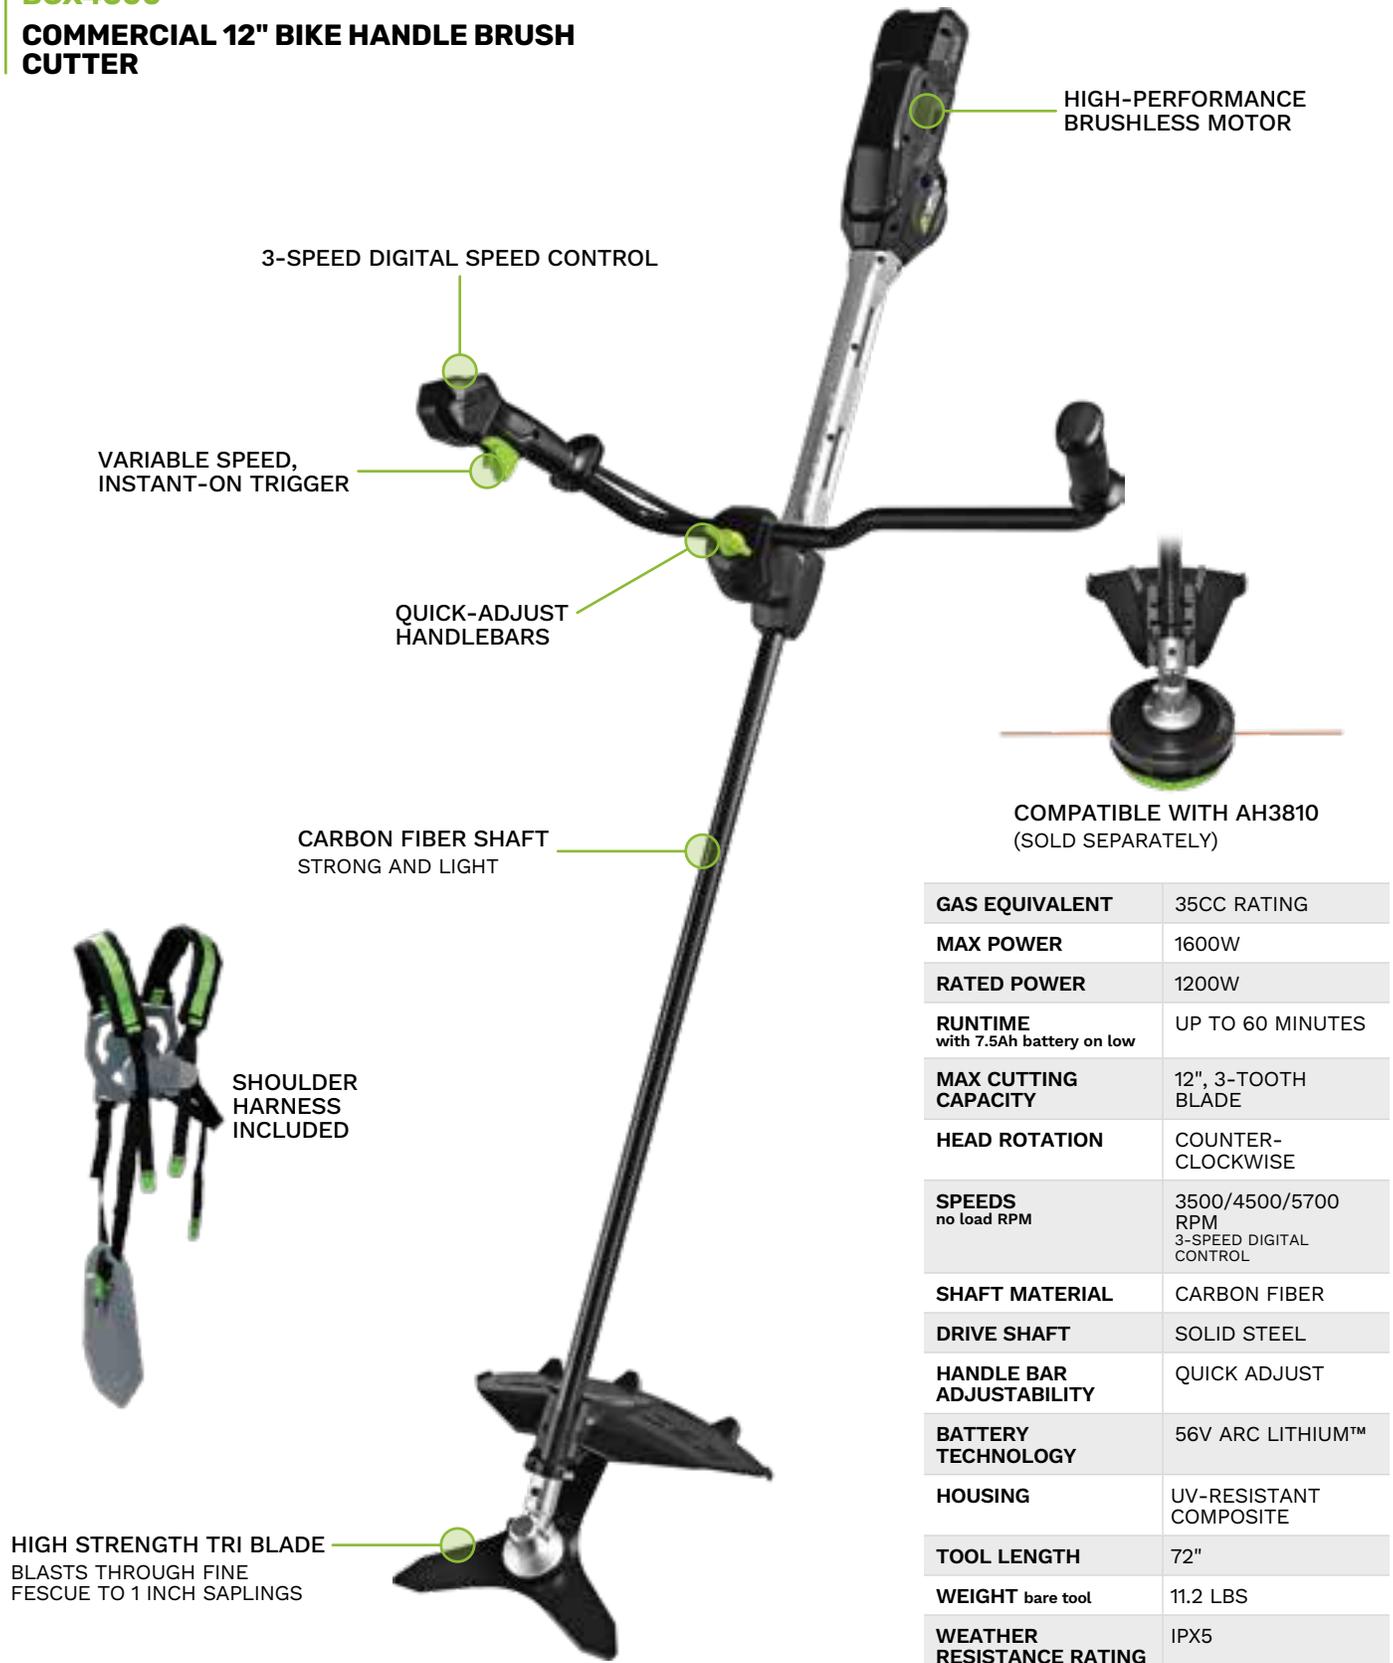

COMPATIBLE WITH AH3810
(SOLD SEPARATELY)

GAS EQUIVALENT	35CC RATING
MAX POWER	1600W
RATED POWER	1200W
RUNTIME with 7.5Ah battery on low	UP TO 60 MINUTES
MAX CUTTING CAPACITY	12", 3-TOOTH BLADE
HEAD ROTATION	COUNTER-CLOCKWISE
SPEEDS no load RPM	3500/4500/5700 RPM 3-SPEED DIGITAL CONTROL
SHAFT MATERIAL	CARBON FIBER
DRIVE SHAFT	SOLID STEEL
HANDLE BAR ADJUSTABILITY	QUICK ADJUST
BATTERY TECHNOLOGY	56V ARC LITHIUM™
HOUSING	UV-RESISTANT COMPOSITE
TOOL LENGTH	72"
WEIGHT bare tool	11.2 LBS
WEATHER RESISTANCE RATING	IPX5


**5X
LONGER
LIFE**

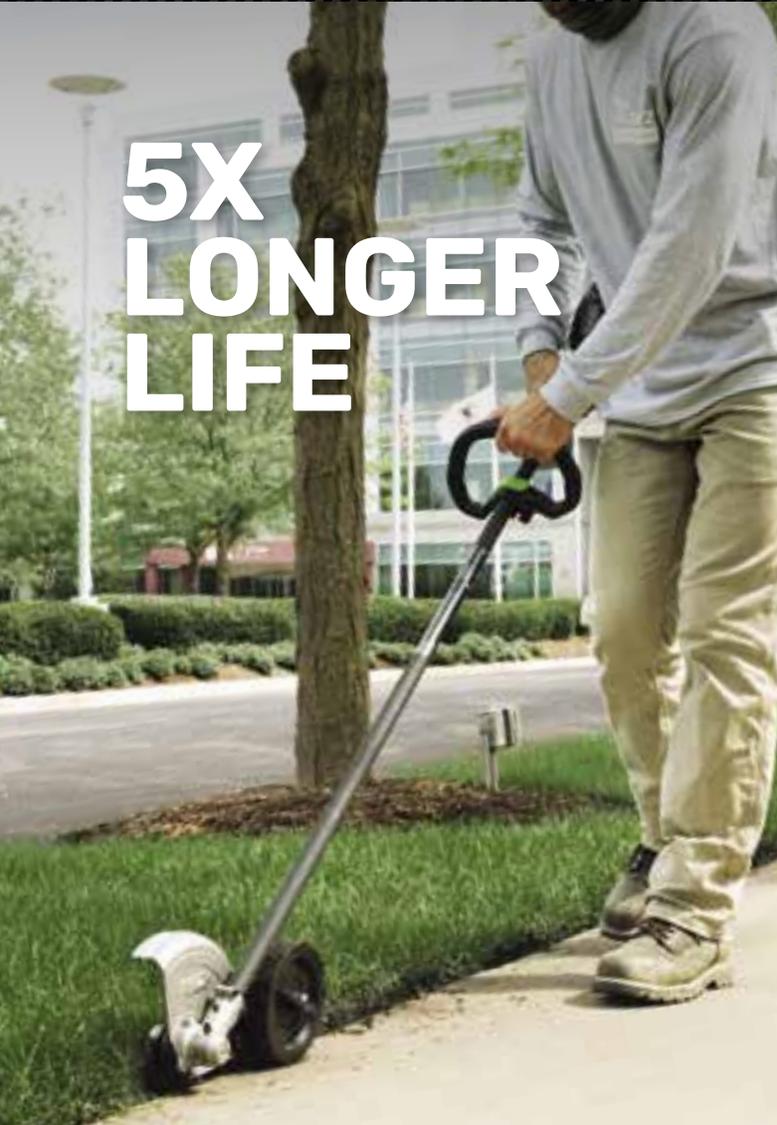

Measured in hours compared to previous EGO model

EDX2000

COMMERCIAL 8" STRAIGHT SHAFT EDGER

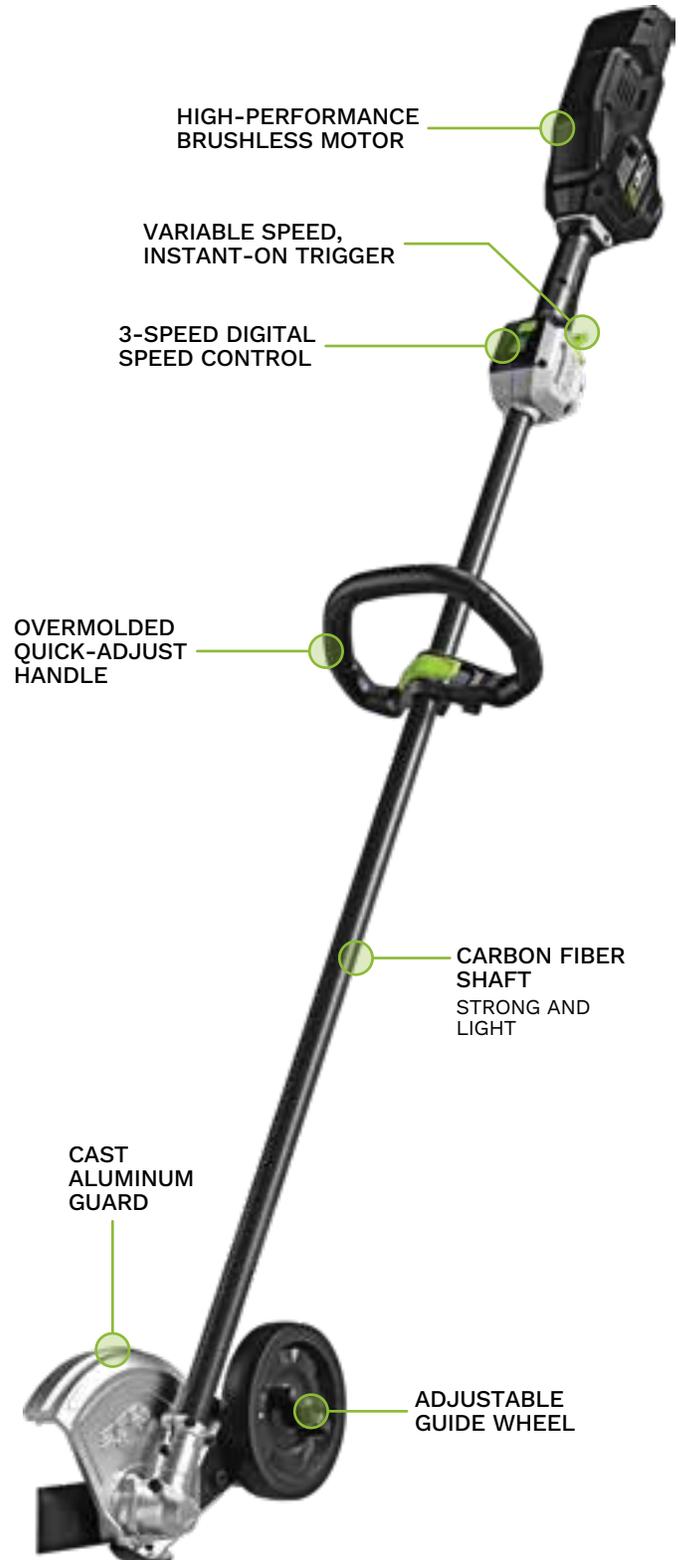

HIGH-PERFORMANCE
BRUSHLESS MOTOR

VARIABLE SPEED,
INSTANT-ON TRIGGER

3-SPEED DIGITAL
SPEED CONTROL

OVERMOLDED
QUICK-ADJUST
HANDLE


CARBON FIBER
SHAFT
STRONG AND
LIGHT

CAST
ALUMINUM
GUARD

ADJUSTABLE
GUIDE WHEEL

EDX2000-C

COMMERCIAL 8" CURVED SHAFT EDGER

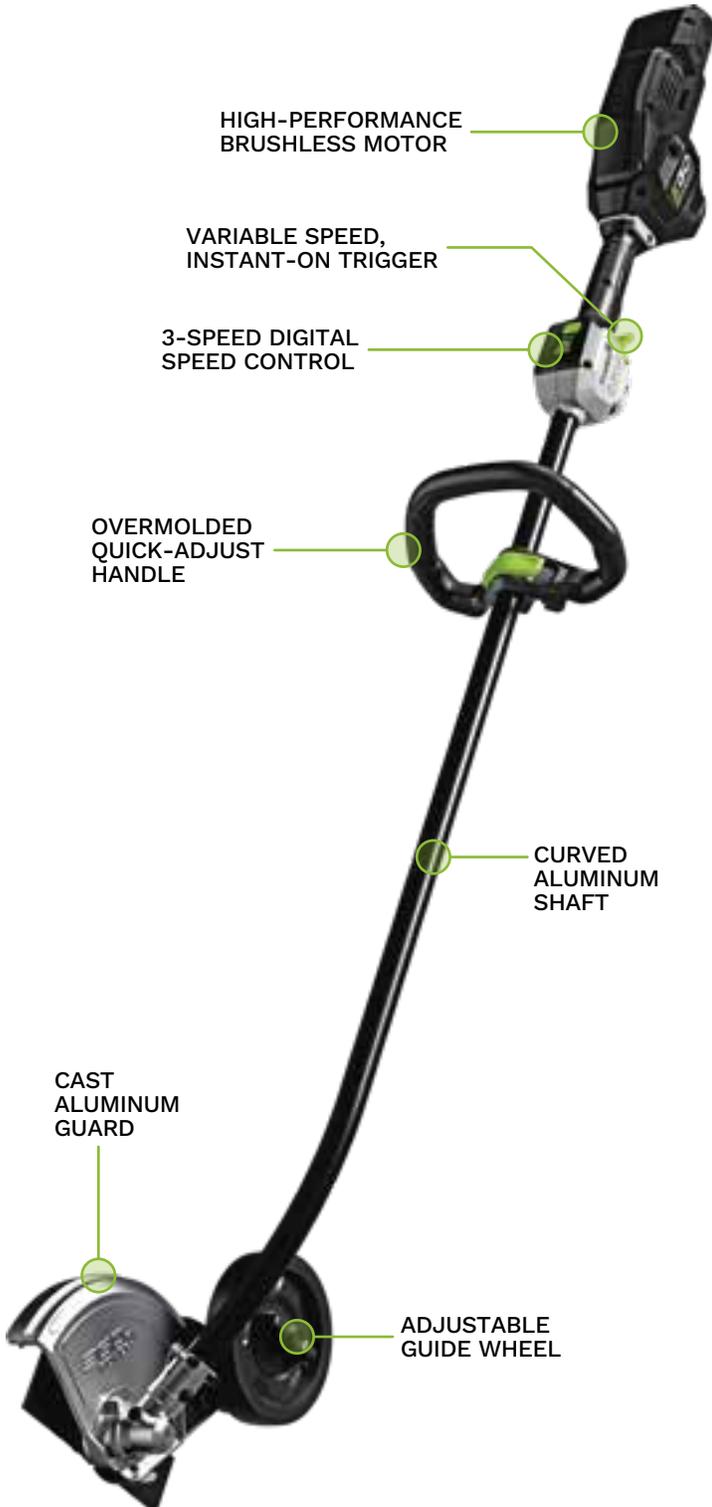

HIGH-PERFORMANCE
BRUSHLESS MOTOR

VARIABLE SPEED,
INSTANT-ON TRIGGER

3-SPEED DIGITAL
SPEED CONTROL

OVERMOLDED
QUICK-ADJUST
HANDLE


CURVED
ALUMINUM
SHAFT

CAST
ALUMINUM
GUARD

ADJUSTABLE
GUIDE WHEEL



	EDX2000	EDX2000-C
GAS EQUIVALENT	25CC RATING	
MAX POWER	1600W	2300W
RATED POWER	1200W	1600W
RUNTIME <small>with 5.0Ah battery on low</small>	UP TO 60 MINUTES	
BLADE SIZE	8"	
MAX CUTTING DEPTH	3"	
ARBOR SIZE	1 INCH	
SPEEDS <small>no load RPM</small>	3000/4000/4500 RPM	4000/5500/7000 RPM
SHAFT MATERIAL	CARBON FIBER	ALUMINUM
SHAFT STYLE	STRAIGHT	CURVED
DRIVE SHAFT	SOLID STEEL	FLEXIBLE
BATTERY TECHNOLOGY	56V ARC LITHIUM™	
HOUSING	UV-RESISTANT COMPOSITE	
TOOL LENGTH	69.5"	67.3"
WEIGHT <small>bare tool</small>	10.4 LBS	
WEATHER RESISTANCE RATING	IPX5	

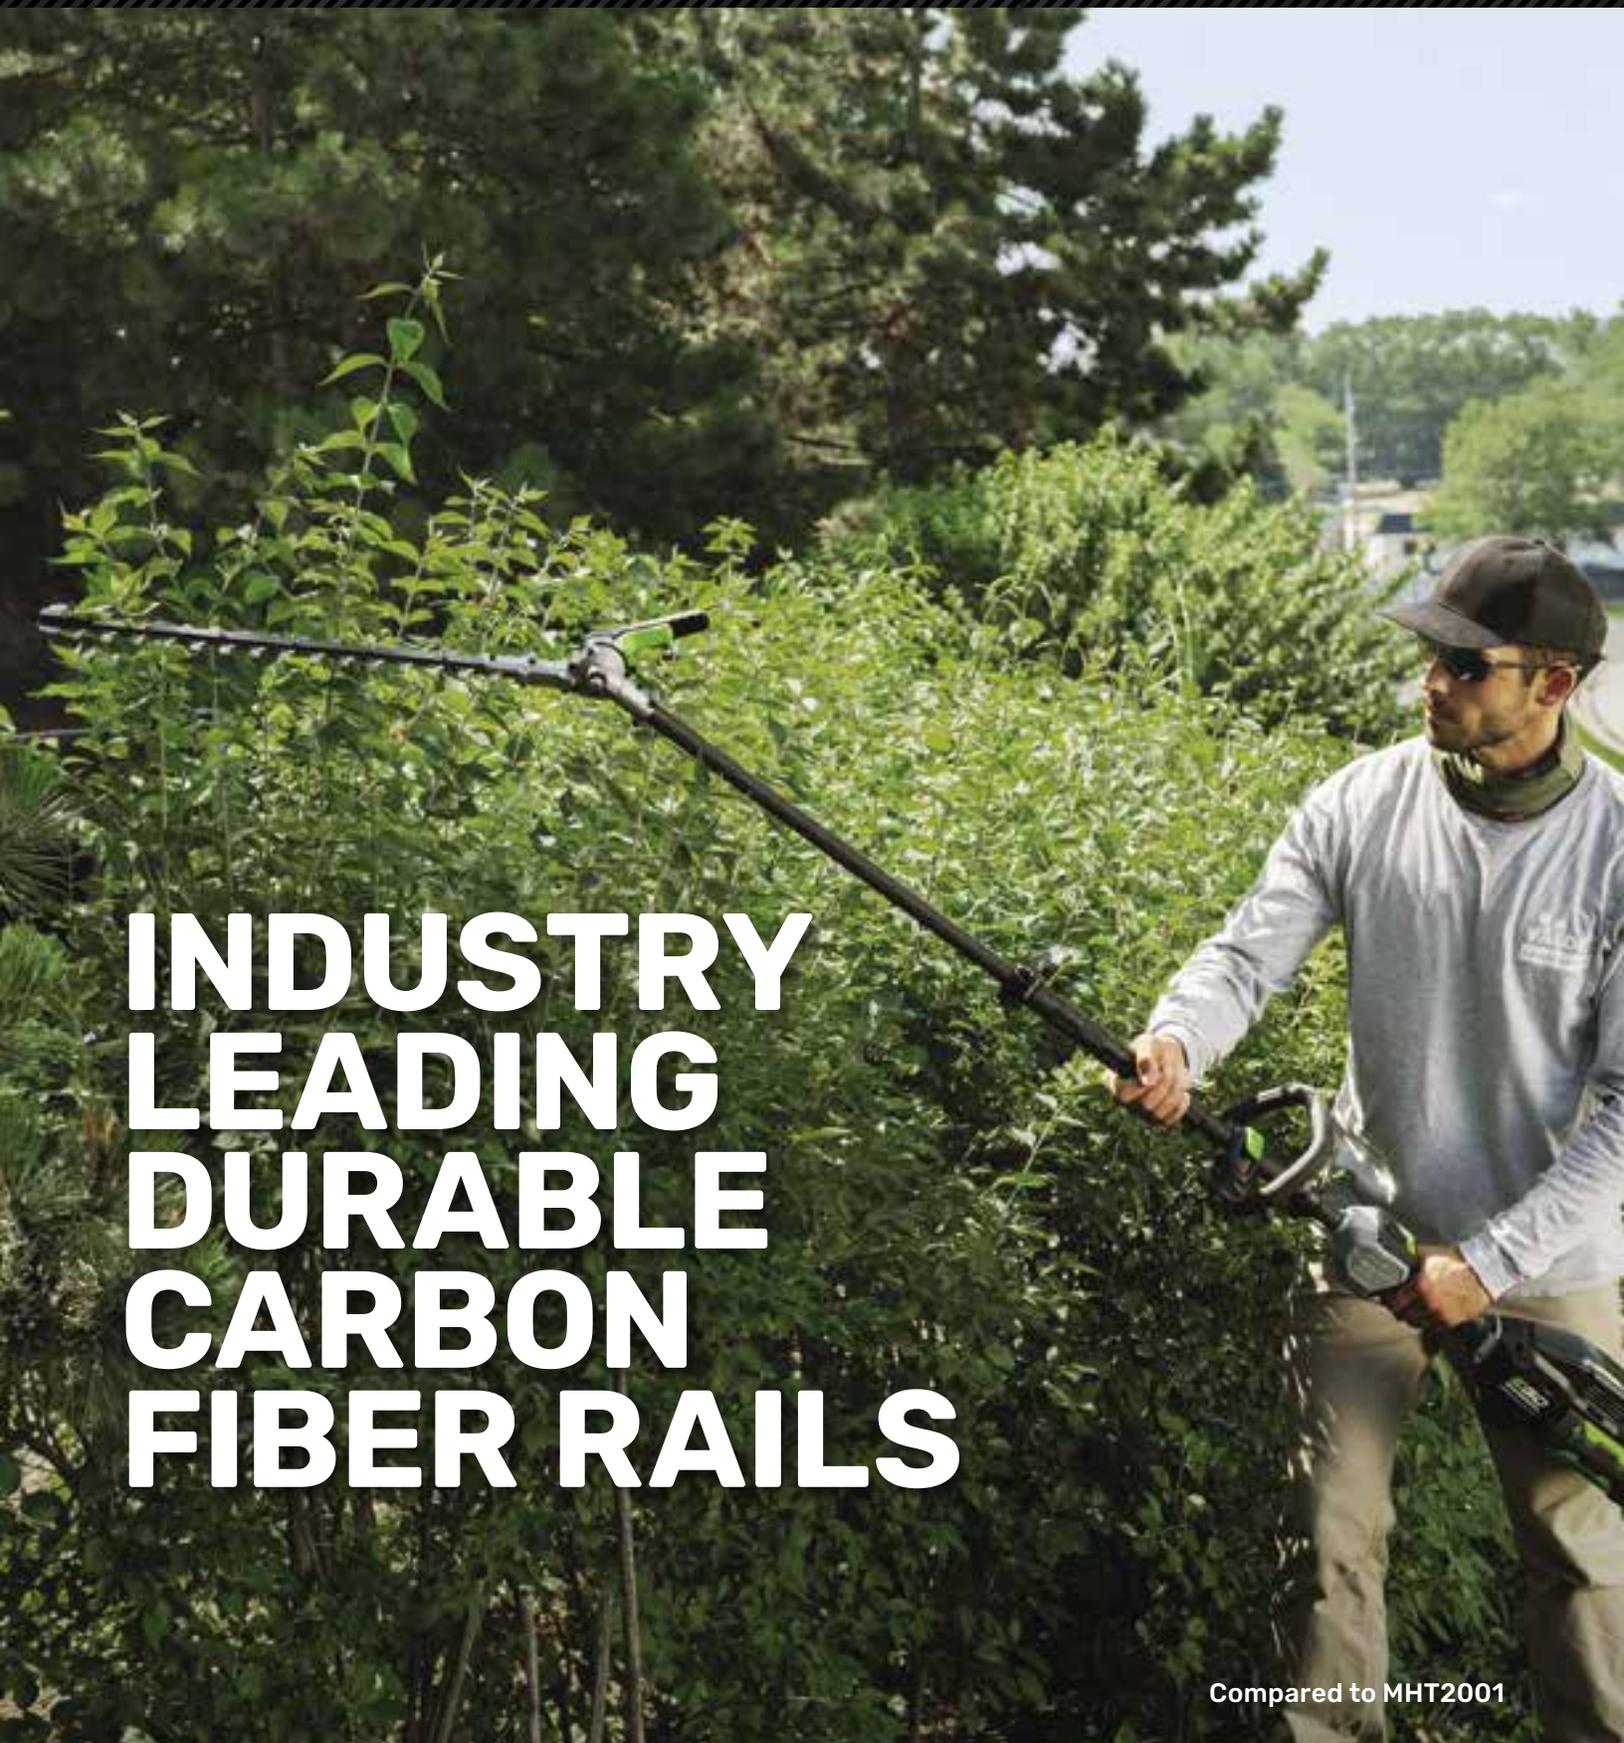


**INDUSTRY
LEADING
DURABLE
CARBON
FIBER RAILS**

Compared to MHT2001

HTX5300-PA

COMMERCIAL 21" ARTICULATING POLE HEDGE TRIMMER

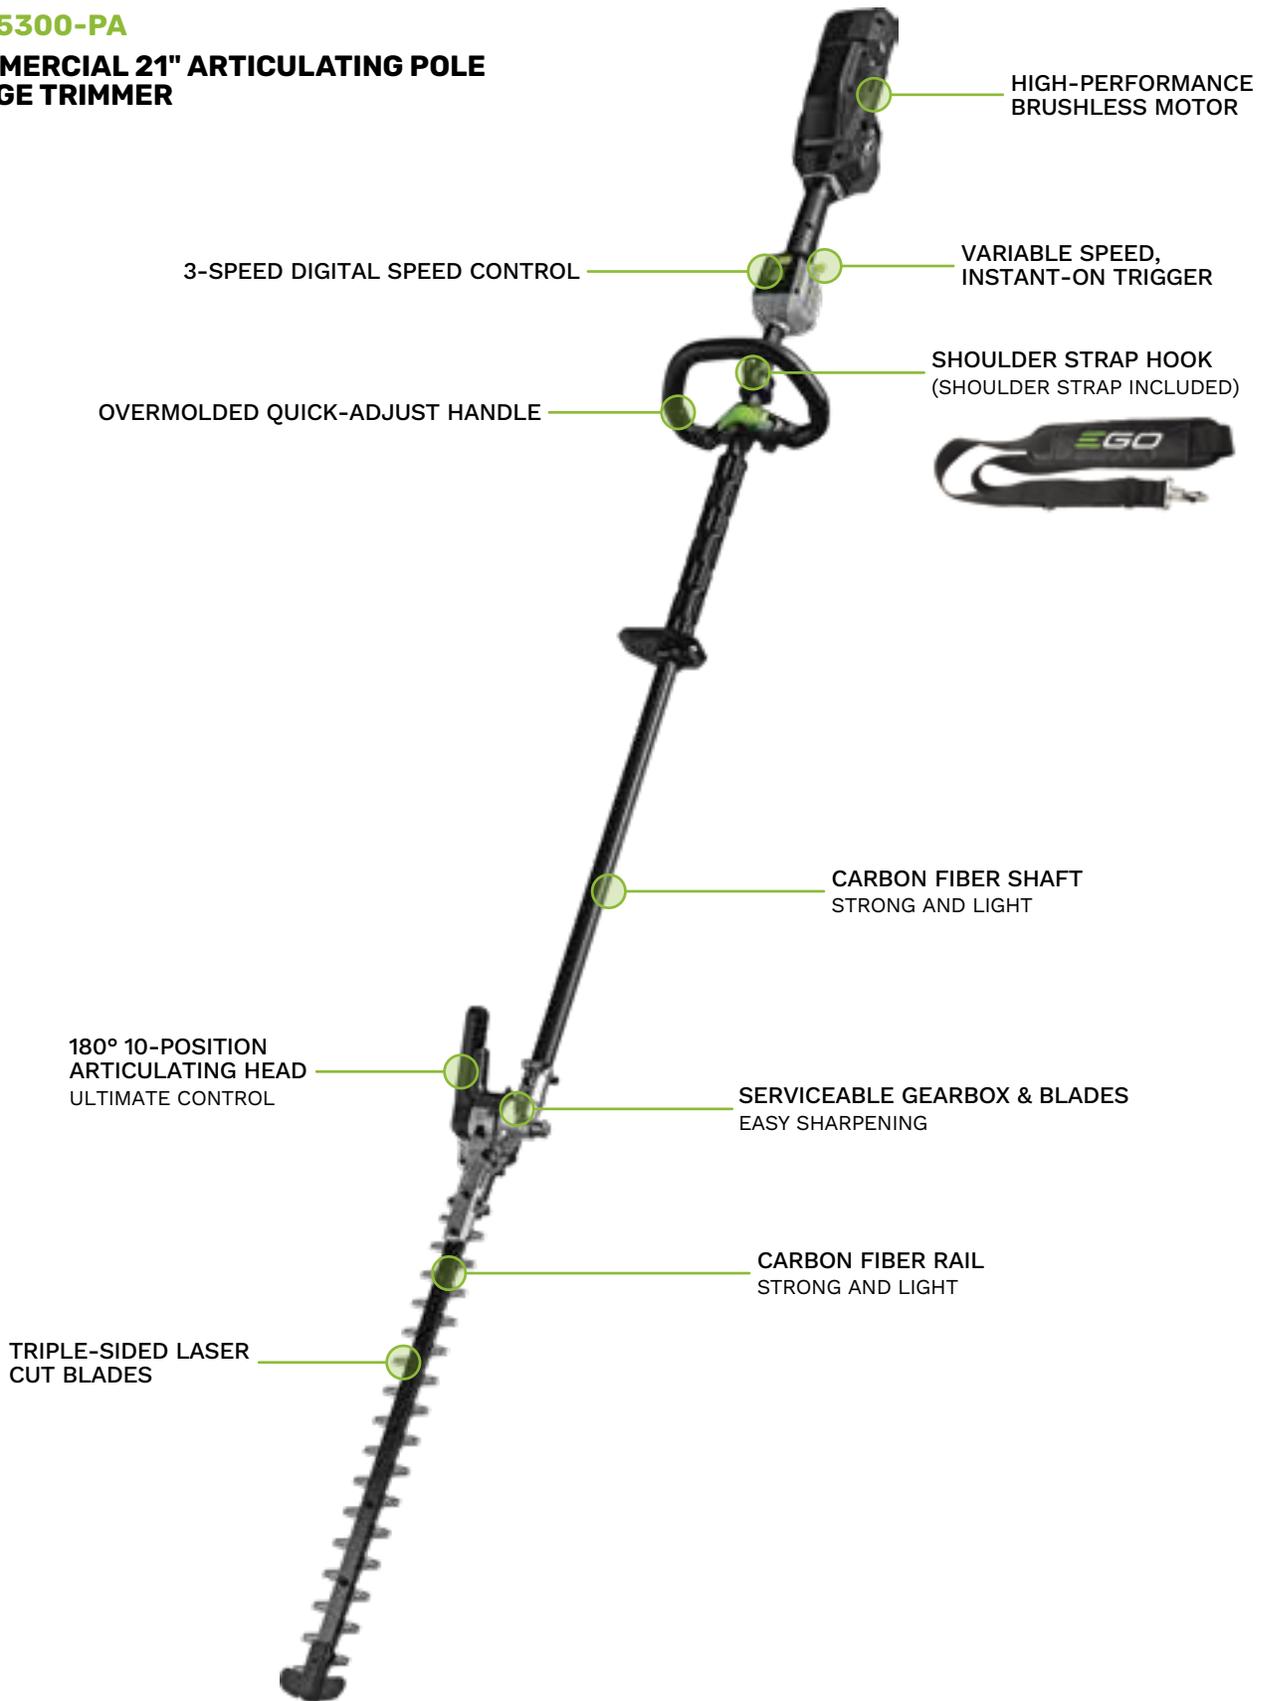

HIGH-PERFORMANCE BRUSHLESS MOTOR

3-SPEED DIGITAL SPEED CONTROL

VARIABLE SPEED, INSTANT-ON TRIGGER

OVERMOLDED QUICK-ADJUST HANDLE

SHOULDER STRAP HOOK (SHOULDER STRAP INCLUDED)



CARBON FIBER SHAFT STRONG AND LIGHT

180° 10-POSITION ARTICULATING HEAD ULTIMATE CONTROL

SERVICEABLE GEARBOX & BLADES EASY SHARPENING


CARBON FIBER RAIL STRONG AND LIGHT

TRIPLE-SIDED LASER CUT BLADES




HTX5310-P

**COMMERCIAL 21" EXTENDED POLE
HEDGE TRIMMER**

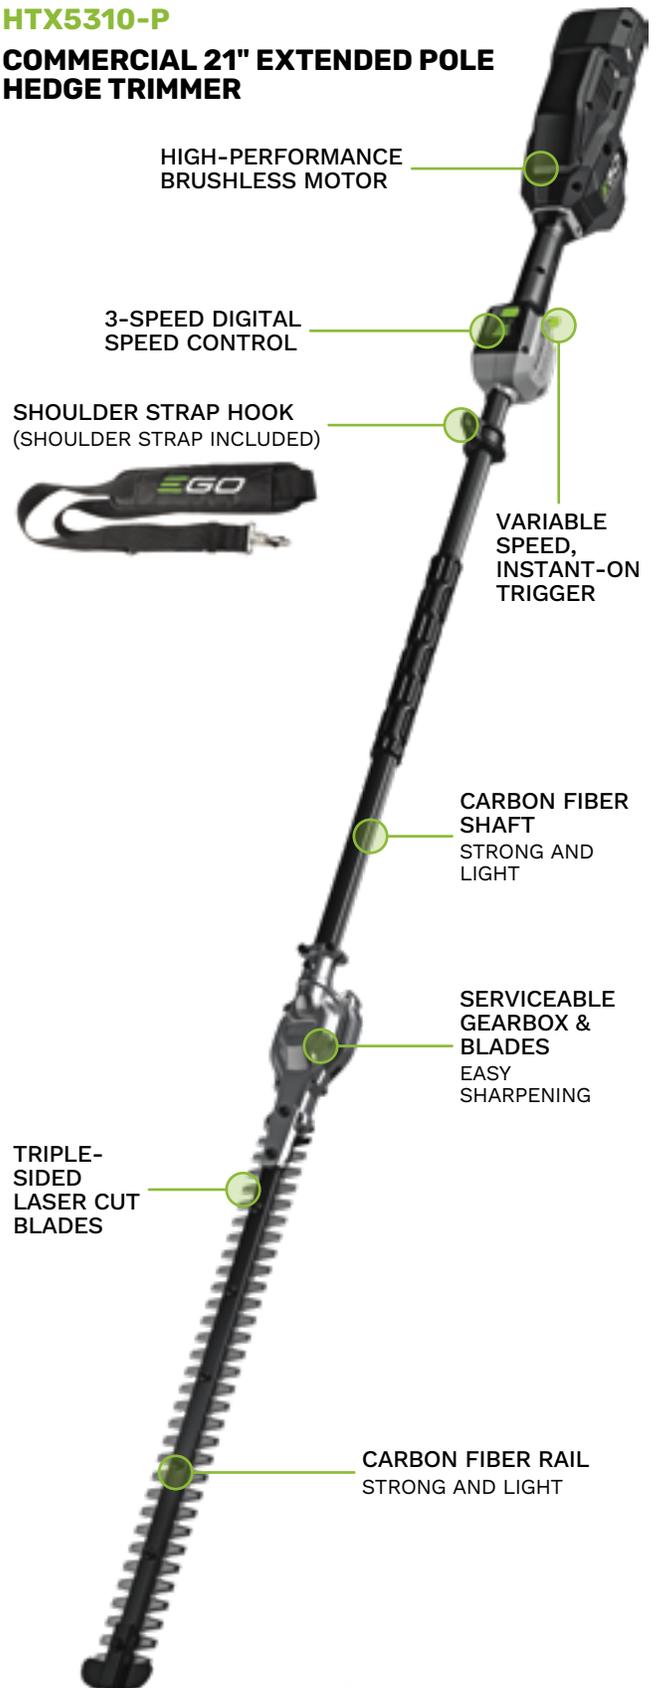

HTX5300-P

COMMERCIAL 21" SHORT POLE HEDGE TRIMMER

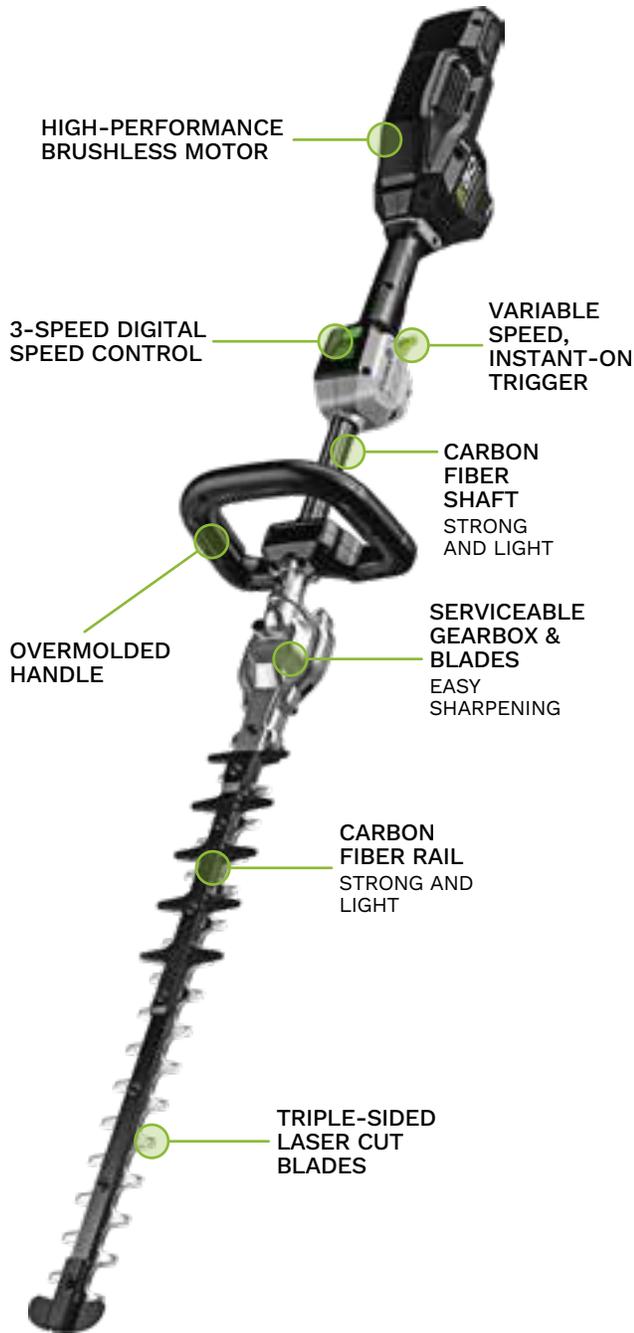

	HTX5300-PA	HTX5310-P	HTX5300-P
GAS EQUIVALENT	25CC RATING		
MAX POWER	1000W		
RATED POWER	650W		
RUNTIME with 2.5Ah battery on low	UP TO 75 MINUTES		
BLADE	21-INCH DUAL-ACTION HARDENED STEEL		
CUTTING CAPACITY	1.1"		
CUTTING POSITIONS	45°, 30°, 15°, 0°, -15°, -30°, -45°, -60°, -75°, -90°, -180°	0°	
HEAD ROTATION	180° ARTICULATING MAX RANGE	FIXED	
SPEEDS	3200/3600/4000 RPM		
SHAFT MATERIAL	CARBON FIBER		
GEARBOX	DIE CAST ALUMINUM/SERVICEABLE		
BATTERY TECHNOLOGY	56V ARC LITHIUM™		
HOUSING	UV-RESISTANT COMPOSITE		
SHAFT LENGTH	59"	42"	20"
OVERALL LENGTH	98.2"	82.7"	59.1"
WEIGHT bare tool	11 LBS	9.0 LBS	9.2 LBS
WEATHER RESISTANCE RATING	IPX5		



40% LIGHTER

Compared to dedicated telescoping pole saws

PSX2510

COMMERCIAL 10" TELESCOPIC POLE SAW



GAS EQUIVALENT	25CC RATING
RUNTIME with 2.5Ah battery	UP TO 110 CUTS
BAR LENGTH	10"
SHAFT MATERIAL	CARBON FIBER
CHAIN SPEED	VARIABLE SPEED UP TO 20 M/S
CHAIN SPECS	1/4 INCH PITCH .043 INCH GAUGE 56 DRIVE LINKS
CHAIN ADJUSTMENT	MANUAL
LIMB HOOK	METAL
EXTENSION METHOD	TELESCOPING
MAX TOOL LENGTH	UP TO 13 FEET
TOOL REACH EXTENDED with included extension pole	UP TO 17 FEET
OILING	AUTOMATIC
BATTERY TECHNOLOGY	56V ARC LITHIUM™
HOUSING	UV-RESISTANT COMPOSITE
WEIGHT bare tool	9.3 LBS
WEATHER RESISTANCE RATING	IPX5


INDUSTRY'S MOST ADVANCED CHAIN SAW

Based on September 2024 cordless 20" chain saws available

CSX5000

COMMERCIAL 20" CHAIN SAW

- BACKLIT DISPLAY**
- SAFETY BRAKE ON/OFF
 - LED WORK LIGHT
 - BLUETOOTH
 - 3-MODE SPEED SELECT
 - BATTERY FUEL GAUGE
 - OVERLOAD INDICATOR
 - LOW OIL INDICATOR
 - OIL FLOW CONTROL

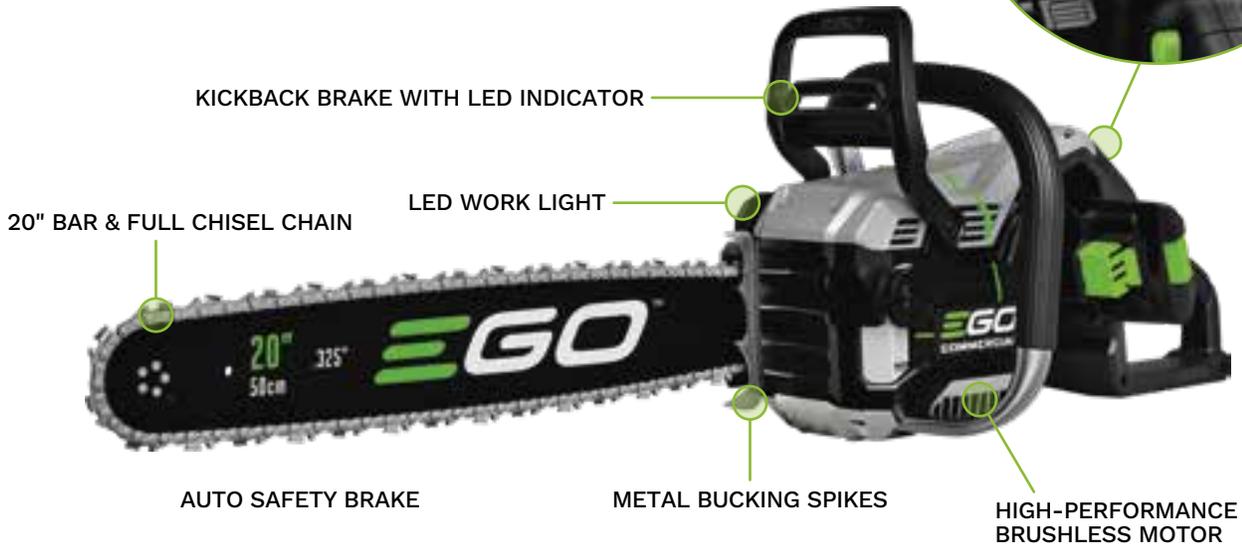

Additional SKU Configurations:
CSX5007 Includes 8.0Ah battery and 550W charger.

CSX3000


COMMERCIAL 12" SERIES TOP-HANDLE CHAIN SAW




	CSX5000	CSX3000
GAS EQUIVALENT	60CC RATING	35.2CC RATING
MAX CUTTING CAPACITY 4 x 4 wood	UP TO 275 CUTS with 8.0Ah battery	UP TO 265 CUTS with 5.0Ah battery
MAX POWER	3500W	2500W
RATED POWER	2700W	1800W
BAR LENGTH	20"	12"
CHAIN SPEED	30 M/S	20 M/S
CHAIN SPECS	.325 INCH PITCH .050 INCH GAUGE 78 DRIVE LINKS	3/8 INCH PITCH .043 INCH GAUGE 45 DRIVE LINKS
CHAIN ADJUSTMENT	MANUAL	
OILING	AUTOMATIC	
CHAIN KICK BACK BRAKE	YES	
AUTO SAFETY BRAKE	YES	NO
BUCKING SPIKES	METAL	
DIGITAL USER INTERFACE	YES	NO
LED WORK LIGHT	YES	NO
BATTERY TECHNOLOGY	56V ARC LITHIUM™	
HOUSING	UV-RESISTANT COMPOSITE	
WEIGHT bare tool	13 LBS	7.7 LBS
WEATHER RESISTANCE RATING	IPX5	

Additional SKU Configurations:
CSX3003 Includes 5.0Ah battery and 550W charger.

ONE HEAD POWERS MULTIPLE TOOLS

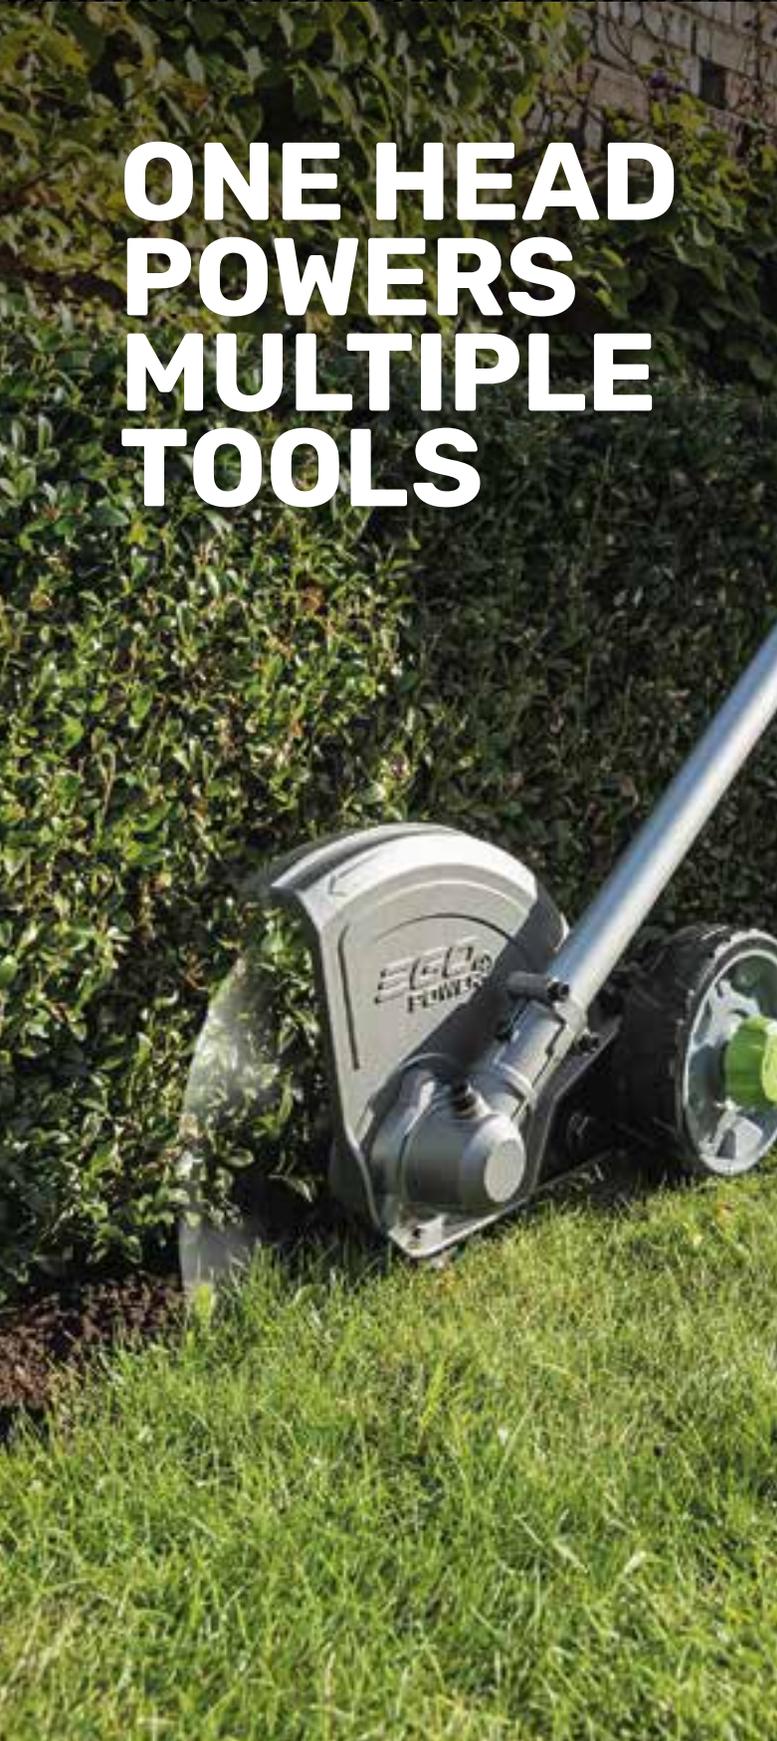

PHX1600 COMMERCIAL POWER HEAD

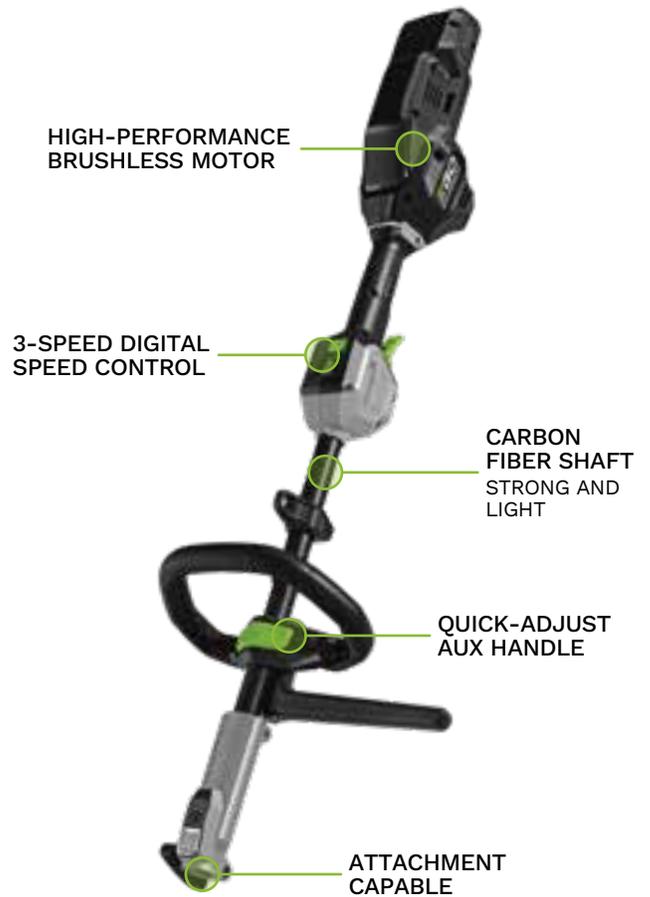

GAS EQUIVALENT	35CC RATING
MAX POWER	1600W
RATED POWER	1200W
SPEED SETTINGS	6000/6500/7000 RPM
SHAFT ROTATION	COUNTER-CLOCKWISE
SHAFT MATERIAL	CARBON FIBER
SHAFT THICKNESS	2.0 MM
BATTERY TECHNOLOGY	56V ARC LITHIUM™
HOUSING	UV-RESISTANT COMPOSITE
WEIGHT bare tool	9 LBS
WEATHER RESISTANCE RATING	IPX5

THE MOST ADVANCED TECHNOLOGY IN THE INDUSTRY

BETTER PERFORMANCE IS BUILT IN


No matter which EGO battery you choose, you'll get:

- Protection from drops and the elements, thanks to our shock-resistant design
- Patented ARC Lithium design keeps the battery from overheating
- Patented power management system to maximize power and runtime
- An integrated fuel gauge that shows you how much power is left
- Two years with registration completed within 90 days from date of purchase. One-year warranty without registration



ARC[™] **56V**
LITHIUM

ALL VOLTS ARE NOT CREATED EQUAL

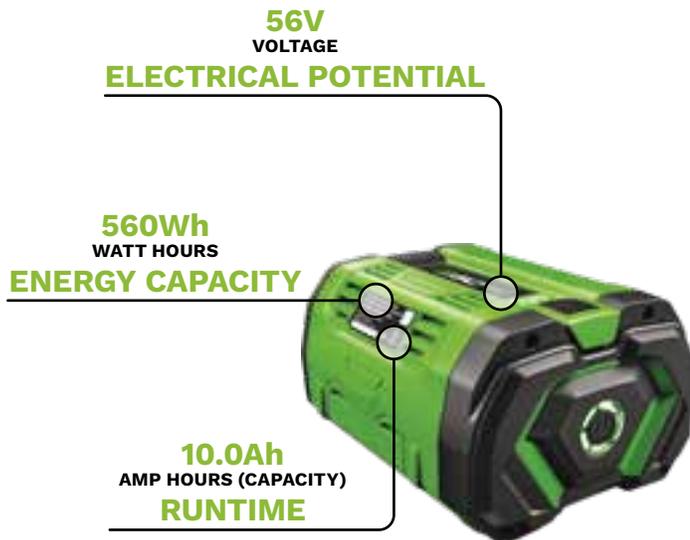

VOLTAGE ≠ PERFORMANCE

Performance of a battery is determined by a combination of **ENERGY(Wh)** and **POWER(W)**

$$\text{CAPACITY (Ah)} \times \text{VOLTAGE (V)} = \text{ENERGY (Wh)}$$

$$\text{VOLTAGE (V)} \times \text{CURRENT (A)} = \text{POWER (W)}$$

BA1400T
2.5Ah BATTERY
140Wh



BA4200T
7.5Ah BATTERY
420Wh



BA2242T
4.0Ah BATTERY
224Wh



BA4480T
8.0Ah BATTERY
448Wh



BA2800T
5.0Ah BATTERY
280Wh



BA5600T
10.0Ah BATTERY
560Wh



BA2800T-2
5.0Ah BATTERY 2-PACK
560Wh TOTAL



BA6720T
12.0Ah BATTERY
672Wh



BA3360T
6.0Ah BATTERY
336Wh



BA6720T-2
12.0Ah BATTERY 2-PACK
1,344Wh TOTAL



PGX™ CHARGING ACCESSORIES

ACE0700

PGX™ 2-FOOT POWER CABLE

Compatible with PGX3000D & PGX1400PB



ACE1500

PGX™ 5-FOOT POWER CABLE


Compatible with PGX3000D & PGX1400PB



AEK1000

PGX™ E-TRACK MOUNTING KIT

Compatible with PGX1600H & PGX3000D



MOWER ACCESSORIES

AB5301

22" High-Lift Commercial Blade



STRING TRIMMER ACCESSORIES

AD4510

TRIMMER GUARD

Compatible with STX4500 & BCX4500



AH3800

MANUAL LOAD BUMP HEAD

Compatible with STX3800, STX4500, BCX3800 & BCX4500



AH3810

RAPID RELOAD TRIMMER HEAD

Compatible with STX3800, STX4500, BCX3800 & BCX4500



AL2403

PREMIUM CRIMPED TRIMMER LINE

0.095" x 800' / 3 lbs.



AL2405

PREMIUM CRIMPED TRIMMER LINE

0.095" x 1400' / 5 lbs.



AL2420PB

PREMIUM PRE-CUT TWISTED TRIMMER LINE

0.095" x 14' / 5 pre-cut coils



STRING TRIMMER ACCESSORIES continued

AL2438

HIGH-PERFORMANCE TWISTED TRIMMER LINE

0.095" x 125'



AL2470B

PREMIUM TWISTED TRIMMER LINE

0.095" x 230'



AL2703

PREMIUM CRIMPED TRIMMER LINE

0.105" x 690' / 3 lbs.



AS3800

REPLACEMENT TRIMMER SPOOL

Compatible with STX3800, STX4500, BCX3800 & BCX4500



BRUSH CUTTER ACCESSORIES

ABB1203

3-TOOL METAL BLADE

Compatible with STX3800, STX4500, BCX3800 & BCX4500



ABB1203-1

3-TOOL METAL BLADE COMBO KIT

Compatible with STX3800, STX4500, BCX3800 & BCX4500



AP4500D

DOUBLE SHOULDER BRUSH CUTTER HARNESS

Compatible with BCX4500



HEDGE TRIMMER ACCESSORIES

AHB5300P

21" HEDGE TRIMMER REPLACEMENT BLADE SET

Compatible with HTX5300-P & HTX5310-P



AHB5300PA

21" HEDGE TRIMMER REPLACEMENT BLADE SET

Compatible with HTX5300-PA



POLE SAW ACCESSORIES

AC1000Q

10" POLE SAW CHAIN

Compatible with PSX2510 & PSX2510-FC



AG1000Q

10" POLE SAW BAR

Compatible with PSX2510 & PSX2510-FC



EP1000

3.3 FOOT CARBON FIBER EXTENSION POLE

Compatible with PSX2510 & PSX2510-FC



CHAIN SAW ACCESSORIES

ABH3000

BATTERY HOLSTER

Compatible with CSX3000 & CSX3003



AC1200

12" CHAIN SAW CHAIN

.375" Pitch, .043" Gauge, 45 Drive Links
Compatible with CSX3000 & CSX3003



AC1635

16" CHAIN SAW CHAIN


.325" Pitch, .050" Gauge, 66 Drive Links
Compatible with CSX5000 & CSX5007



AC1835

18" CHAIN SAW CHAIN

.325" Pitch, .050" Gauge, 72 Drive Links
Compatible with CSX5000 & CSX5007



AC2035

20" CHAIN SAW CHAIN

.325" Pitch, .050" Gauge, 78 Drive Links
Compatible with CSX5000 & CSX5007



AG1200

12" CHAIN SAW GUIDE BAR

Compatible with CSX3000 & CSX3003



AK1635

16" CHAIN SAW BAR AND CHAIN KIT

.325" Pitch, .050" Gauge, 66 Drive Links
Compatible with CSX5000 & CSX5007



AK1835

18" CHAIN SAW BAR AND CHAIN KIT

.325" Pitch, .050" Gauge, 72 Drive Links
Compatible with CSX5000 & CSX5007



CHAIN SAW ACCESSORIES continued

AK2035

20" CHAIN SAW BAR AND CHAIN KIT

.325" Pitch, .050" Gauge, 78 Drive Links
Compatible with CSX5000 & CSX5007



SAW LUBRICANT

AOL1000

128 FL OZ PREMIUM BAR & CHAIN LUBRICANT

Premium, oil-free, biodegradable.
Water soluble for easy clean-up



AOL3200

32 FL OZ PREMIUM BAR & CHAIN LUBRICANT

Premium, oil-free, biodegradable.
Water soluble for easy clean-up



SAFETY

GS001

SAFETY GLASSES WITH CLEAR LENSES



GS002

SAFETY GLASSES WITH GRAY LENSES



GS003

SAFETY GLASSES WITH YELLOW LENSES



GV001M

WORK GLOVES

Size Medium, Synthetic Glove
(Note: gloves run small)



GV001L

WORK GLOVES

Size Large, Synthetic Glove
(Note: gloves run small)



GV001XL

WORK GLOVES

Size X-Large, Synthetic Glove
(Note: gloves run small)



GV001XXL

WORK GLOVES

Size XX-Large, Synthetic Glove
(Note: gloves run small)



POWER MANAGER LAUNCH NOW LIVE!



NOTHING ELSE LIKE THIS EXISTS TODAY

- ONLINE PLANNING TOOL REMOVES THE GUESS WORK
- UNDERSTAND TRANSITION COST
- SELF-SERVICE FOR USERS
- SALES TOOL FOR DEALERS



egocommercial.com/pages/power-manager

egocommercial.com/pages/power-manager-guide

SEND ALL QUESTIONS TO POWERMANAGER@EGOCOMMERCIAL.COM



Your local dealer:

egocommercial.com



All rights reserved. Neither this Catalog nor its text, images, illustrations or part thereof, may be reproduced, stored in a retrieval system, photocopied, recorded or transmitted in any form, whether electronic or otherwise, without our consent. To the best of our knowledge, all descriptions, images and illustrations contained in this Catalog are correct at the time of going to print. We cannot, however, be held liable for any inaccuracies of description, image or illustration and reserve the right to change specifications without notification.

©EGO 2025

EGOCOMCTL-25